

SAB AIR SEPARATORS WITH FLANGE




Air separators Heating, solar and cooling systems

- Designed to eliminate air in heating systems, including microbubbles, with minimum load losses
- AUTO operation
- Steel body and stainless steel internal reflectors for air bubbles removal
- High performance brass top air vent (1/2" connection)
- Discharge fitting 1" (GF) with bottom cap
- Red epoxy powder coating
- Manufactured according to 2014/68/EU Directive
- 2 year warranty

Technical specifications

- | | |
|--------------------------|-----------|
| ▪ Max. service pressure: | 10 Bar |
| ▪ Test pressure: | 15 Bar |
| ▪ Temperature max.: | 100°C |
| ▪ Temperature mín.: | -10°C |
| ▪ Water connection: | see below |

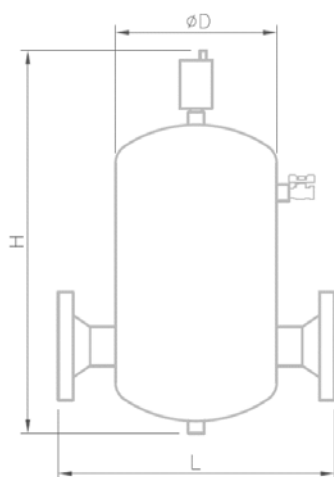

Weight (Kg)	Code	Model	Connection	L (mm)	ØD (mm)	H (mm)
20	18000050B	SAB-50	DN50 PN16	350	168	625
21	18000065B	SAB-65	DN65 PN16	350	168	625
36	18000080B	SAB-80	DN80 PN16	470	270	645
38	18000100B	SAB-100	DN100 PN16	470	270	645
73	18000125B	SAB-125	DN125 PN16	635	360	800
78	18000150B	SAB-150	DN150 PN16	635	360	800
135	18000200B	SAB-200	DN200 PN16	780	400	1.050
241	18000250B	SAB-250	DN250 PN16	880	485	1.155
282	18000300B	SAB-300	DN300 PN16	1.005	600	1.450