


SLS DIRT SEPARATORS WITHOUT FLANGE

Dirt separators Heating, solar and cooling systems

- Designed to eliminate dirt particles in heating systems with minimum load losses
- AUTO operation
- Steel body and stainless steel internal reflectors for air bubbles removal
- R 1" GH bottom drain valve
- 1/2" Top fitting
- Red epoxy powder coating
- Manufactured according to 2014/68/EU Directive
- 2 year warranty

Technical specifications

- | | |
|--------------------------|-----------|
| ▪ Max. service pressure: | 10 Bar |
| ▪ Test pressure: | 15 Bar |
| ▪ Temperature max.: | 100°C |
| ▪ Temperature mín.: | -10°C |
| ▪ Water connection: | see below |

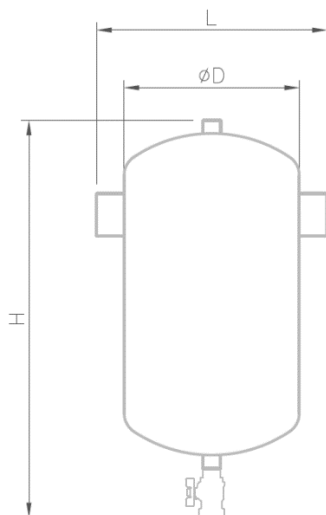

Weight (Kg)	Code	Model	Connection	L (mm)	ØD (mm)	H (mm)
15	18100050S	SLS-50	60,3	335	168	620
16	18100065S	SLS-65	76,1	335	168	620
28	18100080S	SLS-80	88,9	370	270	645
29	18100100S	SLS-100	114,3	370	270	645
60	18100125S	SLS-125	139,7	525	360	780
62	18100150S	SLS-150	168,3	525	360	780
112	18100200S	SLS-200	219,1	650	400	890
208	18100250S	SLS-250	273	750	485	995