


AR-A STAINLESS STEEL

Stainless steel puffer tanks AISI 304 Primary cooling and heating systems



- Manufactured in stainless steel AISI-304.
- Puffer tanks in cooling and heating systems (Not suitable for hot sanitary water HSW).
- Allow to reduce the number of starts / stops of the cooling unit when quick temperature variations occur.
- ErP Directive: Category B-C.
- Thermal insulation in rigid polyurethane foam, free of CFC, 25 mm thickness.
- External finish with embossed aluminium foil.
- Female threaded connections according to specifications.
- 2 x M12 auxiliary fittings for screwing on supports.
- Sleeves are protected with trims and plastic caps
- Supplied with all connections uncapped.
- Se suministran con todas las conexiones sin taponar.
- Designed and manufactured according to 2014/68/UE Directive (Art. 4.3).

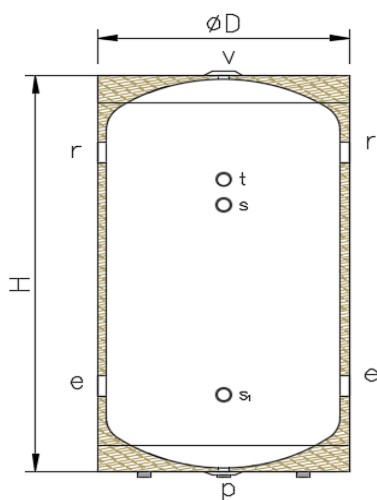

	30 AR-A-SS	50 AR-A-SS
Code	30003065	30005065
Capacity (Liters)	30	50
Maximum Service pressure (Bar)	6	6
Temperature (°C)	-10 +100°C	-10 +100°C
Thermal isolation	Rígido PU	Rígido PU
Isolation thickness (mm)	25	25
External finish	Embossed Aluminium	Embossed Aluminium
ErP	C	C
Weight (Kg)	8	15

DIMENSIONS

ØD: Diameter (mm)	410	410
H: Height (mm)	460	560

CONNECTIONS

e: entrances conn.	2 x 1" G.H	2 x 1" G.H
r: output conn.	2 x 1" G.H	2 x 1" G.H
V: top conn.	½" G.H.	½" G.H.
P: bottom conn.	½" G.H.	½" G.H.
t: termometer	½" G.H.	½" G.H.
s: auxiliar	--	½" G.H.
s1: auxiliar	½" G.H.	½" G.H.